

RJ-250 SC Ultra™ Self-Contained Compactor/Container 34 to 15 Cubic Yard Capacity

Ideal For...

- MALLS ■ SUPERMARKETS ■ LARGE RESTAURANTS ■ HOTELS ■ HOSPITALS AND INSTITUTIONS
- RESORTS AND FOOD PROCESSORS ■ PROPERTY MANAGEMENT ■ SCHOOL SYSTEMS



Totally

Listed!


Ultra Features

- Universal Remote Power Unit
- Programmable Relay
- Full Door Seal with "P" Seal
- Bubble Gate with "Auto Relatch" and Double-Hinge
- Qwik Clean Tank®
- CYCON Life-Xtender® Cyclic Control System

RJ-250SC Ultra with optional doghouse hopper.


MARATHON®
A **DOVER** COMPANY

RAMJET RJ-250SC Ultra™ Compactor/Container

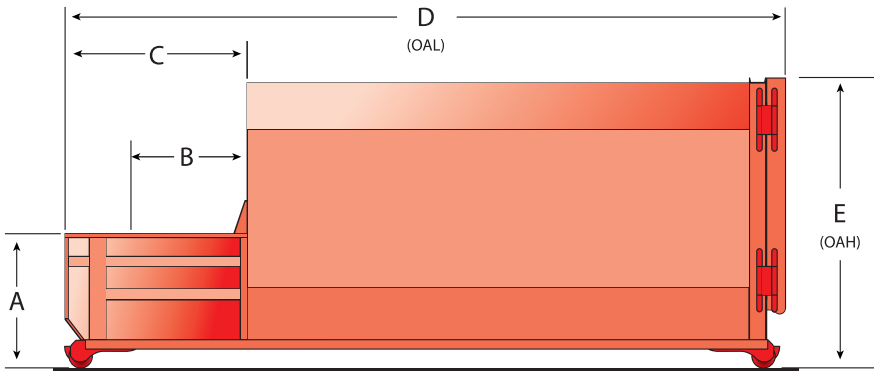

Dimensions not shown: 8' – 4-1/8" (2543 mm) Overall Width
Ground Roller Widths: 61-7/8" (1572 mm) Inside Rollers
 67-3/8" (1712 mm) Roller Centers
 72-7/8" (1851 mm) Outside Rollers

RJ-250SC Ultra	A	B	C	D**	E	WEIGHT
15 cu yds	4' – 0" 1219 mm	3' – 7-1/4" 1099 mm	5' – 7-1/2" 1715 mm	14' – 3" 4344 mm	7' – 5" 2261 mm	8360 lbs 3792 kg
20 cu yds	4' – 0" 1219 mm	3' – 7-1/4" 1099 mm	5' – 7-1/2" 1715 mm	17' – 4" 5284 mm	7' – 5" 2261 mm	8860 lbs 4019 kg
25 cu yds	4' – 0" 1219 mm	3' – 7-1/4" 1099 mm	5' – 7-1/2" 1715 mm	17' – 10-1/2" 5449 mm	8' – 8" 2642 mm	9270 lbs 4205 kg
30 cu yds	4' – 0" 1219 mm	3' – 7-1/4" 1099 mm	5' – 7-1/2" 1715 mm	20' – 5" 6223 mm	8' – 8" 2642 mm	9715 lbs 4407 kg
34 cu yds	4' – 0" 1219 mm	3' – 7-1/4" 1099 mm	5' – 7-1/2" 1715 mm	22' – 5" 6833 mm	8' – 8" 2642 mm	10100 lbs 4582 kg

RJ-250SC ULTRA FEATURES:

- Big 40" x 58" feed opening to handle large, bulky items!
- **Continuous feed capability** – even while compactor is operating!
- Adaptable to special loading systems such as large capacity hoppers, security chutes or total enclosures.
- Total odor and pest control via Marathon's Ozone Odor Control option.
- Easy loading from either ground or dock level.
- Over 24 tons of crushing force to reduce refuse to a fraction of its former size **saving valuable space.**
- Easy and fast installation! Installation costs are cut in half over conventional compaction systems.
- Fire hose connection provided on each unit.
- Factory testing to assure leakproof construction.
- **Totally UL Listed.**

Specifications:

Charge Box Capacity
 [Mfrs. Rating]1.7 cu yd1.3 m³
 [WASTEC Rating]1.29 cu yd98 m³
 Total Capacity34 cu yd25.9 m³
 Clear Top Opening40"L x 58"W ..1016 mm x 1473 mm
 Loading Height48"1219 mm

Performance Characteristics:

Cycle Time33 s33 s
 Total Normal Force39,900 lb177 kN
 Total Maximum Force49,500 lb220 kN
 Normal Ram Face Pressure27.1 psi187 kPa
 Maximum Ram Face Pressure33.7 psi232 kPa
 Ram Penetration6"152 mm

Electrical Equipment:

Electric Motor 3/60/230-46010 hp7.5 kW
 Electric Control Voltage120 VAC120 VAC
 Panel Box Assembly
 UL RatedKey Operated
 All Circuits Fused - 3 Push Button Station Start/Stop/Reverse

Hydraulic Equipment:

Hydraulic Pump10 gpm37.85 L/min
 Normal Pressure1850 psi127.5 bar
 Maximum Pressure2300 psi158.6 bar
 Hydraulic Cylinders (2) - Bore4"102 mm
 - Rod2-1/2"64 mm

See Authorized Dealer



AUTHORIZED DEALER:



1042 E. Fort Union #260
 Midvale, UT. 84047
 Ph. 801-565-1033
 fax 280-565-1044

Action Compaction Equipment www.actioncompaction.com



Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI Regulation Z245.21, all OSHA standards, and certified under WASTEC's Compactor Certification Program. Products must be used with safe practice and in accordance with said regulations and standards.