

STEALTH

Manual-Tie Horizontal Baler



The Stealth Baler can also be fitted with a hydraulic bale door release.


NEXGEN's **STEALTH Baler** is specially designed for baling OCC and similar material and is the **most affordable horizontal baler on the market!**

- ▼ With its large 46" x 60" feed opening, the **STEALTH** can produce bales of cardboard that weigh more than 1600 pounds!
- ▼ Bale wires can be inserted through the door or sides
- ▼ Patents Pending



STEALTH®

Manual-Tie Horizontal, Closed-End Baler

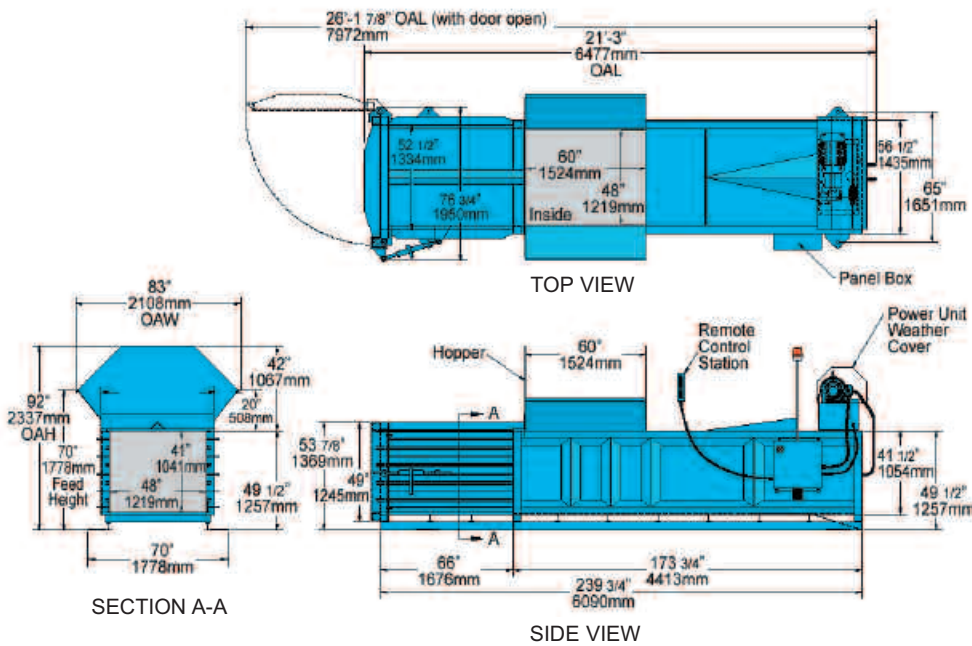

Standard Features

- ▼ 46" w x 60" L Feed Opening (4 other sizes available upon request)
- ▼ Hand Feed Type Hopper
- ▼ 2-3 Tons/Hour Throughput
- ▼ Through Door & Side Tie-Off
- ▼ Start Up Alarm
- ▼ Manual Controls
- ▼ Electrical Disconnect
- ▼ Self-Contained Power Unit

Optional Features

- ▼ Photocell Control
- ▼ Hydraulic Bale Door Release
- ▼ Bale Made Alarm
- ▼ Full Penetration Ram
- ▼ Chute Feed Hopper
- ▼ Conveyor Controls
- ▼ Oil Heater

Specifications

Dimensional

Length	255" (6477mm)
Width	83" (2108mm)
Height	92" (2337mm)
Hopper Type	Hand Feed
Feed Opening	46"W x 60"L (1168mm x 1524mm)
Feed Height	70" (1778mm)

Baler Weight (approx.) 11,300 lbs. (5126 kg)

Performance

Cycle Time	50 sec.
Maximum Force	67,900 lbf. (302 kN)
Ram Face Pressure	43 psi (296.5 kPa)

Output

Bale Size	42" x 48" x 60" (1067mm x 1219mm x 1524mm)
Bale Weight (OCC)	1600 lbs. + (726 kg)
Throughput	2 - 3 tons/hr (1814 - 2722 kg/hr)

Hydraulics

Cylinder Size	6" bore x 4" rod 152mm x 102mm)
Cylinder Stroke	82" (2083mm)
Pump Flow	18.5 gpm (70 L/min)
Reservoir Size	30 gal. (113.6 lit.)
Maximum Pressure	2400 psi (165 bar)

Electrical

Motor Size	20 hp (14.9 kW)
Main Voltage	460 VAC, 3 phase
Control Voltage	120 VAC
Control Panel	UL Listed



Authorized Dealer:
Action Compaction Equipment
 1042 E Fort Union #260
 Midvale, UT 84047
 ph. (801)565-1033 . fax (801)565-1044
 www.actioncompaction.com

